
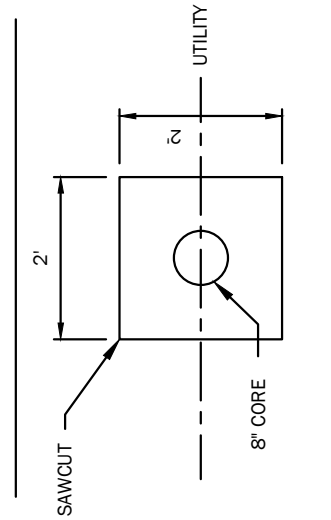
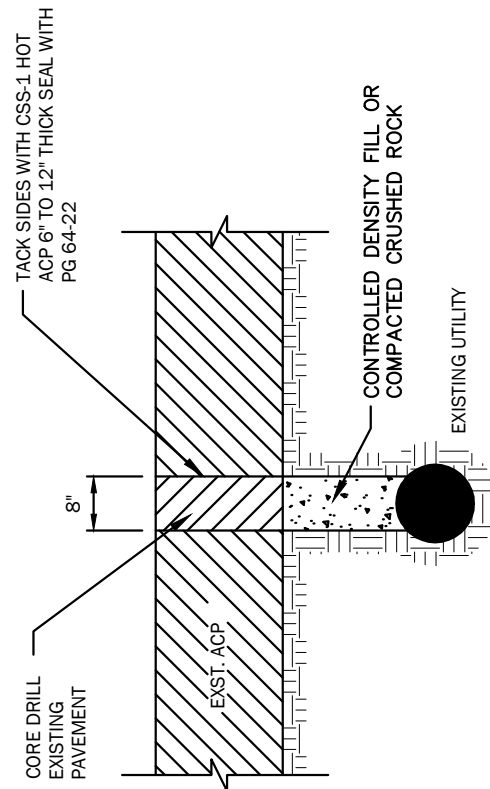


**ALTERNATE REPAIR**  
WHEN REQUIRED BY ENGINEER

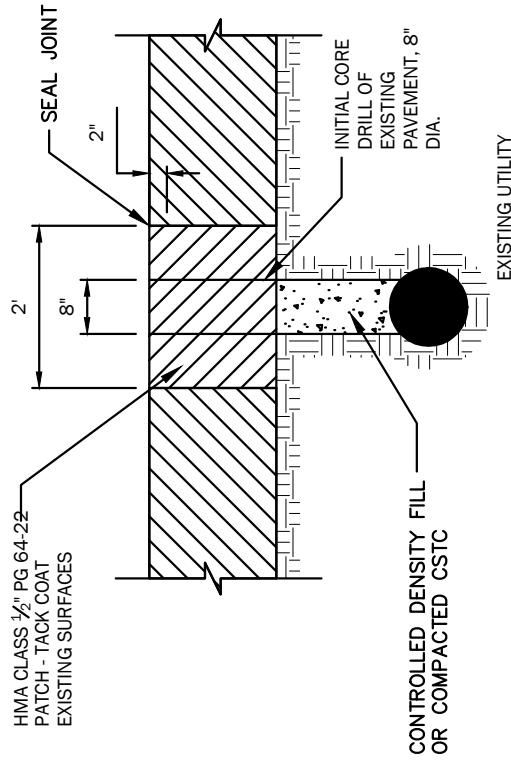

**NOTES:**

1. THE EXISTING PAVEMENT SHALL BE CUT FULL DEPTH WITH AN EIGHT INCH DIAMETER CORE DRILL. THE SUBBASE MATERIAL SHALL BE REMOVED USING A VACUUM EXCAVATOR, KEEPING THE EXCAVATION AS MINIMAL AS POSSIBLE.
2. BACKFILL THE EXCAVATION WITH A SIX INCH CUSHION OF CRUSHED ROCK OVER THE UTILITY THEN PLACE THE REMAINING VOID WITH CDF OR COMPACTED CSTC.
3. REPAIR THE CORED PAVEMENT SECTION WITH HMA CLASS 1/2 PG 64-22 AND SEAL THE JOINT.
4. IF THE EXCAVATION BELOW THE ASPHALT PAVEMENT IS LARGER THAN THE 8 INCH CORE, THE PAVEMENT RESTORATION WILL INCLUDE A 2' BY 2' TEE PATCH FULL DEPTH OF THE ASPHALT CENTERED ON THE EXCAVATION, AS SHOWN ABOVE AS ALTERNATE REPAIR.
5. IF THE EXCAVATION IS LARGER THAN 2' BY 2', THE STANDARD GRIND AND OVERLAY RESTORATION SHALL BE USED.

**TOWN OF YARROW POINT**  
4030 95TH AVENUE NE  
YARROW POINT, WA 98004  
P: (425) 454-6994 F: (425) 454-7899  
townhall@ci.yarrow-point.wa.us  
www.ci.yarrow-point.wa.us



**ASPHALT RESTORATION  
FOR WINDOW CUTS**

**RD-13d**